

Submittal

Job _____
 Location _____
 Submitted to _____
 Submittal Prepared by _____
 Approve Date _____
 Date _____

Fire Damper Series 05 Type C

UL Classified - **3 Hour Rating**, Static
 For use in installations rated 3 hours or greater

Standard Profile (4 1/4") 22 Ga
 1 piece rollformed frame

Type C Damper
 Blades and frame out of air-stream, 100% free area

Available for vertical and horizontal installations

Standard fusible link - 165° F (optional 212°F)

Available in stainless steel

Available in single-section sizes to 60" x 60"

Duct sizes 4" to 53" Ø vertical

4" to 38" horizontal

Oval and rectangular collars from

4" x 4" to 58" x 52" vertical





4" x 4" to 38" x 52" horizontal

Optional 22 Ga Sleeve available:

8", 12", 17", 20", or 24" lengths (12" is standard)



S
C
E
P
S

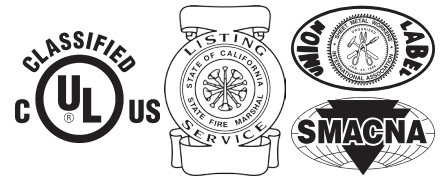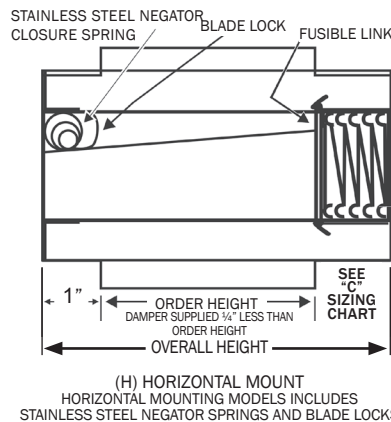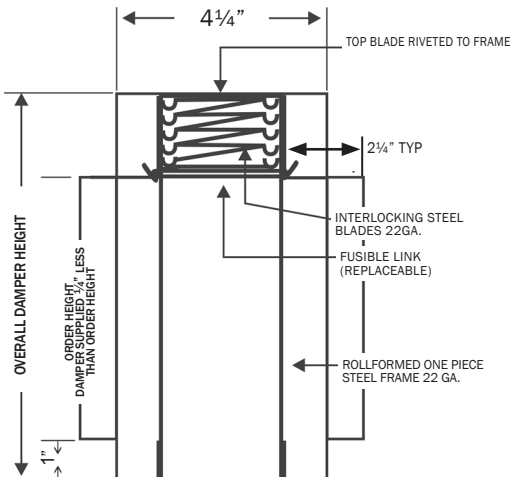


This product meets the requirements
for fire dampers established by:

UL Standards 555
NFPA Standard 90A
ICC Building Codes

Qty.	Mount	Damper Diameter	Fusible Link Temp (165°F) std.	Factory Sleeve Length
	(V) vertical (H) horizontal			

Part Number Format

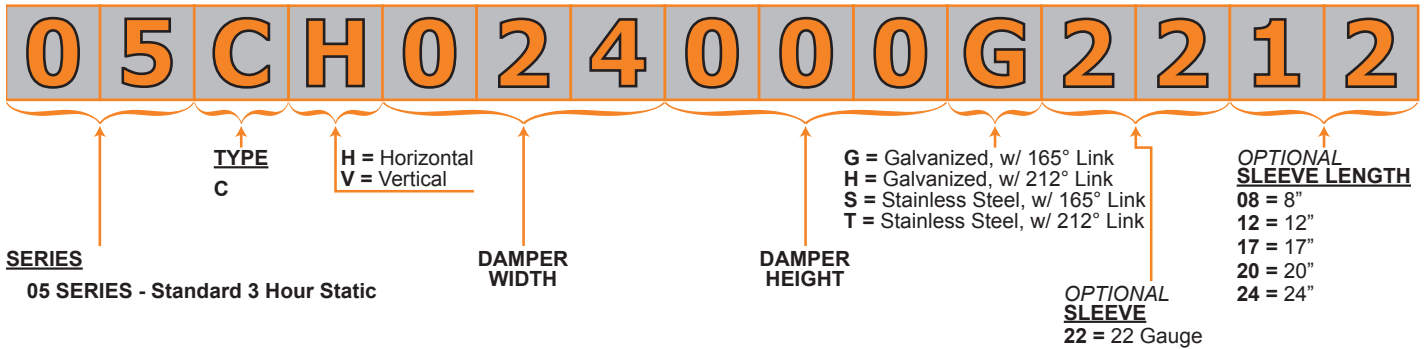

Submittal



AireTechnologies, Inc.
a DMI company

AireTechnologies, Inc.
1502 Industrial Drive
E. Monongahela, PA 15063

phone: 866.421.AIRE
fax 724.310.1262

www.airetechnologies.com