

Submittal

Job _____
 Location _____
 Submitted to _____
 Submittal Prepared by _____
 Approve Date _____
 Date _____

Fire Damper Series 66 Type A

UL Classified - **3 Hour Rating**, Dynamic
 For use in installations rated 3 hours or greater

Thinline Profile (2") 22 Ga
 1 piece rollformed frame

Type A Damper
 Blades in air-stream


Available for vertical installation **ONLY**

For installation in systems where fans remain running
 during fire and smoke control



Standard fusible link - 165° F (optional 212° F)

Available in single-section sizes from
 4" x 4" to 24" x 24"

Optional 22 Ga Sleeve available:
 8", 12", 17", 20", or 24" lengths (12" is standard)

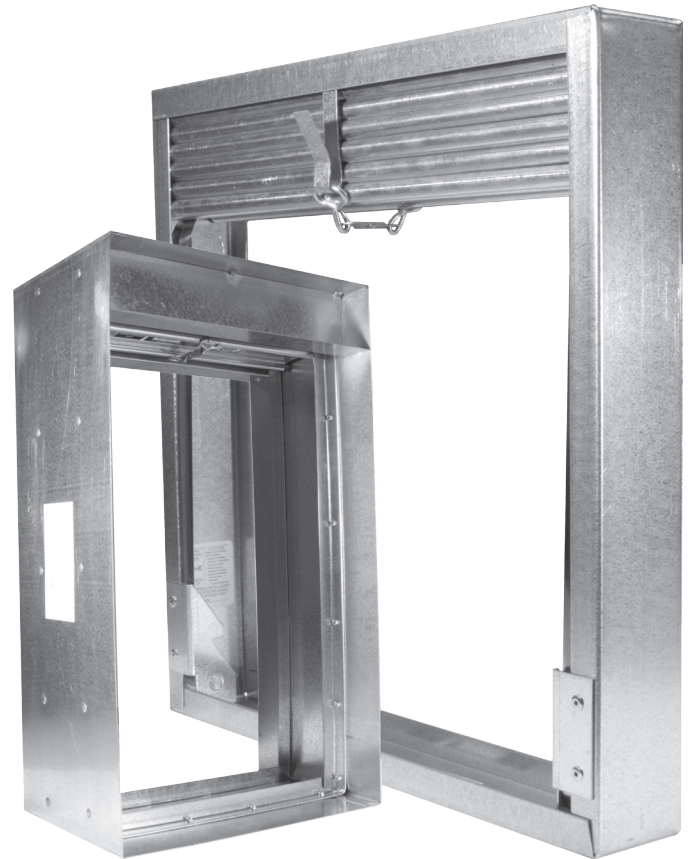

S
C
E
P
S

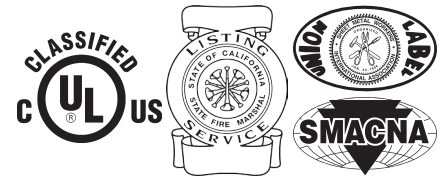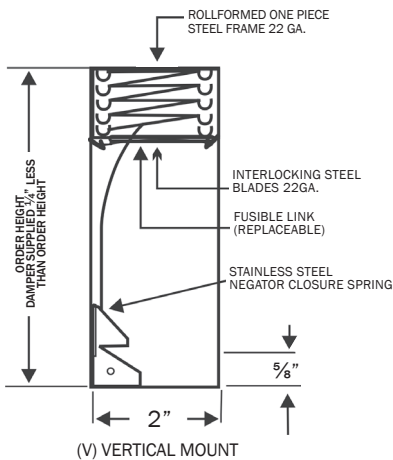


This product meets the requirements
 for fire dampers established by:

UL Standards 555
NFPA Standard 90A
ICC Building Codes

Qty.	Mount	Damper Size		Fusible Link Temp (165°F) std.	Factory Sleeve Length
	(V) vertical	W	H		

Part Number Format

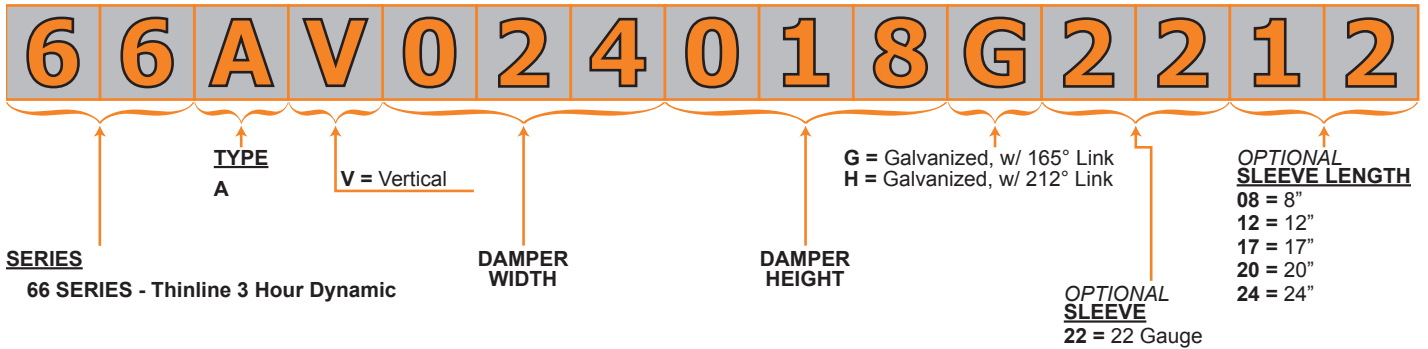

Submittal



AireTechnologies, Inc.
a DMI company

AireTechnologies, Inc.
1502 Industrial Drive
E. Monongahela, PA 15063

phone: 866.421.AIRE
fax 724.310.1262

www.airetechnologies.com