

Submittal

Job _____
 Location _____
 Submitted to _____
 Submittal Prepared by _____
 Approve Date _____
 Date _____

Fire Damper Series 77 Type C

UL Classified - 1½ Hour Rating, Dynamic
 For use in installations rated less than 3 hours

Standard Profile (4¼") 22 Ga
 1 piece rollformed frame

Type C Damper
 Blades and frame out of air-stream, 100% free area

Available for vertical and horizontal installations





For installation in systems where fans remain running
 during fire and smoke control

Standard fusible link - 165° F (optional 212° F)

Available in stainless steel

Available in single-section sizes
 from 4" to 31" Ø vertical, from 4" to 20" Ø horizontal
 Oval and rectangular collars from 4" x 4" to 34" x 31" vertical,
 from 4" x 4" to 22" x 20" horizontal

Optional 22 Ga Sleeve available:
 8", 12", 17", 20", or 24" lengths (12" is standard)

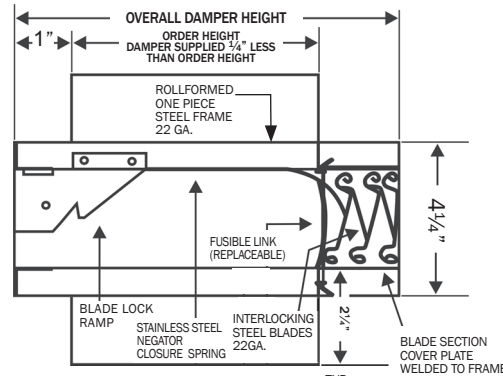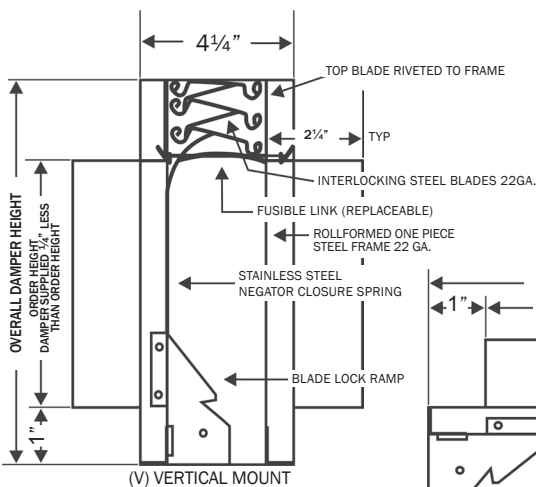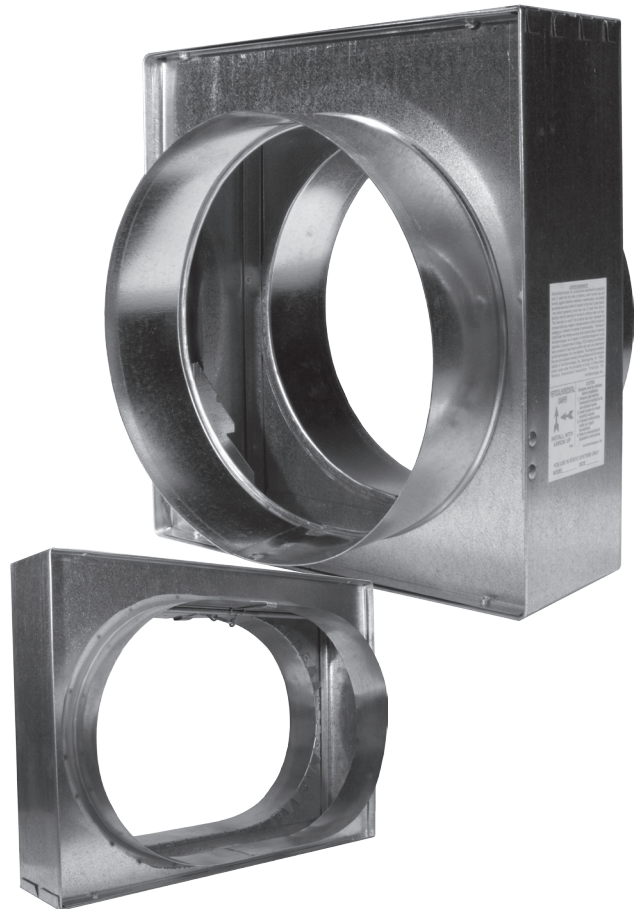


This product meets the requirements
 for fire dampers established by:

UL Standards 555
NFPA Standard 90A
ICC Building Codes

Qty.	Mount	Damper Size		Fusible Link Temp (165°F) std.	Factory Sleeve Length
	(V) vertical (H) horizontal	W	H		

Part Number Format

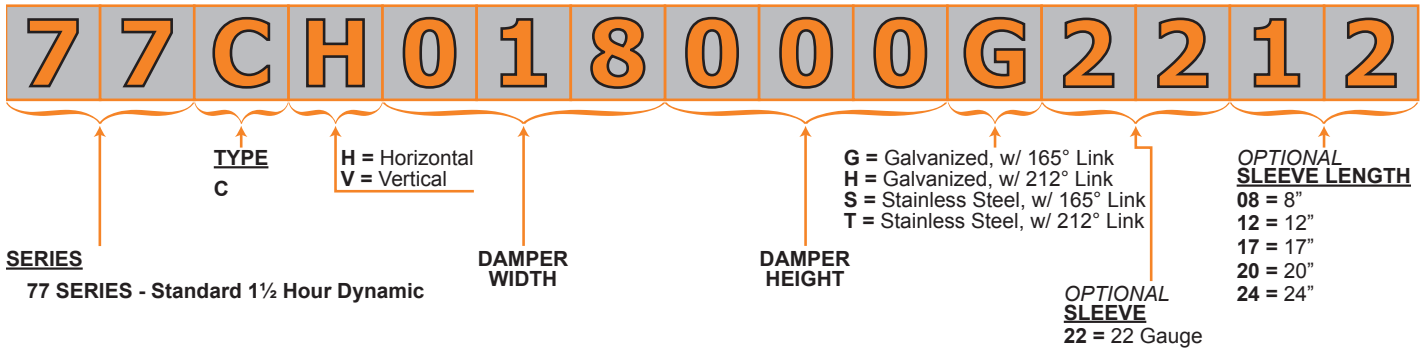

Submittal



AireTechnologies, Inc.
a DMI company

AireTechnologies, Inc.
1502 Industrial Drive
E. Monongahela, PA 15063

phone: 866.421.AIRE
fax 724.310.1262

www.airetechnologies.com