

Submittal

Job _____
 Location _____
 Submitted to _____
 Submittal Prepared by _____
 Approve Date _____
 Date _____

Fire Damper Series 95 Type B

UL Classified - **3 Hour Rating**, Static
 For use in installations rated 3 hours or greater

Thinline Profile (2") 22 Ga
 1 piece rollformed frame

Type B Damper
 Blades out of air-stream

Available for vertical installations **ONLY**


Standard fusible link - 165° F (optional 212° F)

Available in stainless steel

Available in single-section sizes

Vertical - 4" x 3" to 48" x 41"

Optional 22 Ga Sleeve available:
 8", 12", 17", 20", or 24" lengths (12" is standard)

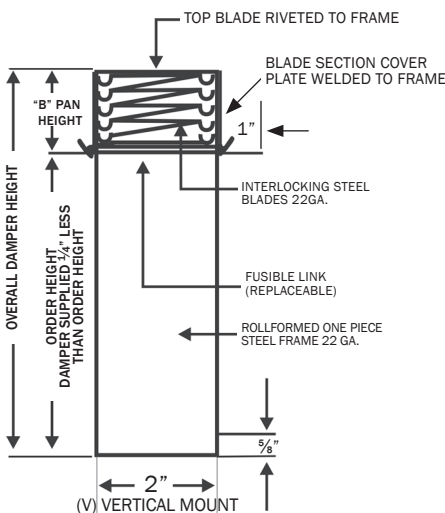

This product meets the requirements for fire dampers established by:

UL Standards 555
NFPA Standard 90A
ICC Building Codes

Qty.	Mount	Damper Size		Fusible Link Temp (165° F) std.	Factory Sleeve Length
	(V) vertical	W	H		

Part Number Format

9 5 B V 0 2 4 0 1 8 G 2 2 1 2



Submittal



AireTechnologies, Inc.
a DMI company

AireTechnologies, Inc.
1502 Industrial Drive
E. Monongahela, PA 15063

phone: 866.421.AIRE
fax 724.310.1262

www.airetechnologies.com