

AireTechnologies, Inc. 1502 Industrial Drive E. Monongahela, PA 15063

phone: 866.421.AIRE fax 724.310.1262

www.airetechnologies.com



Job_______ Location ______ Submitted to ______ Submittal Prepared by ______ Approve Date ______ Date

UL Classified - 1½ Hour Rating, Static For use in installations rated less than 3 hours

Thinline Profile (2") 22 Ga 1 piece rollformed frame

Type B Damper Blades out of air-stream

S

Φ

 \mathbf{Q}

S

Available for vertical and horizontal installations

Standard fusible link - 165° F (optional 212° F)

Available in stainless steel


Available in single-section sizes from


Vertical - 4" x 3" to 48" x 41" Horizontal - 4" x 3" to 36" x 30"


Optional 22 Ga Sleeve available:

8", 12", 17", 20", or 24" lengths (12" is standard)

Fire Damper Series 65 Type B

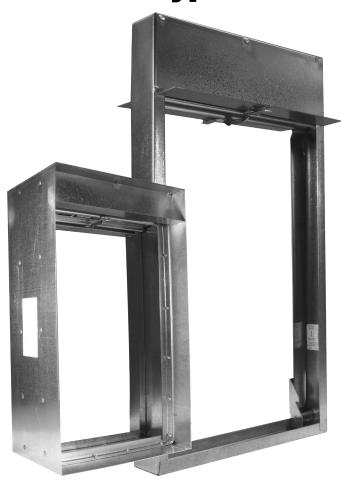





(H) HORIZONTAL MOUNT HORIZONTAL MOUNTING MODELS INCLUDES STAINLESS STEEL NEGATOR SPRINGS AND BLADE LOCKS




This product meets the requirements for fire dampers established by:

UL Standards 555 NFPA Standard 90A ICC Building Codes

Qty.	Mount	Damper Size		Fusible Link Temp	
	(V) vertical (H) horizontal	W	Н	(165°F) std.	Factory Sleeve Length

Part Number Format

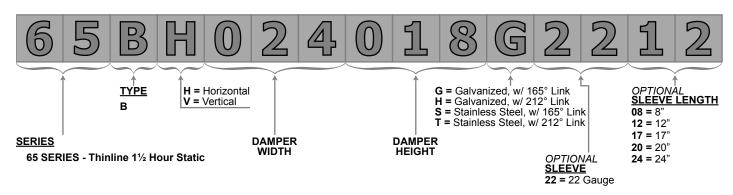





AireTechnologies, Inc. 1502 Industrial Drive E. Monongahela, PA 15063

phone: 866.421.AIRE fax 724.310.1262