

submittal

Job _____
 Location _____
 Submitted to _____
 Submittal Prepared by _____
 Approve Date _____
 Date _____

Fire Damper Series 75 Type C

UL Classified - 1½ Hour Rating, Static
 For use in installations rated less than 3 hours

Standard Profile (4¼") 22 Ga
 1 piece rollformed frame

Type C Damper
 Blades and frame out of air-stream, 100% free area

Available for vertical and horizontal installations


Available w/round, oval or rectangular collar

Standard fusible link - 165° F (optional 212° F)





Available in stainless steel

Available in single-section sizes to 60" x 60"
 Duct sizes from 4" to 53" Ø vertical, 4" to 38" Ø horizontal
 Oval and rectangular collars from
 4" x 4" to 58" x 52" vertical
 4" x 4" to 38" x 52" horizontal

Optional 22 Ga Sleeve available:
 8", 12", 17", 20", or 24" lengths (12" is standard)

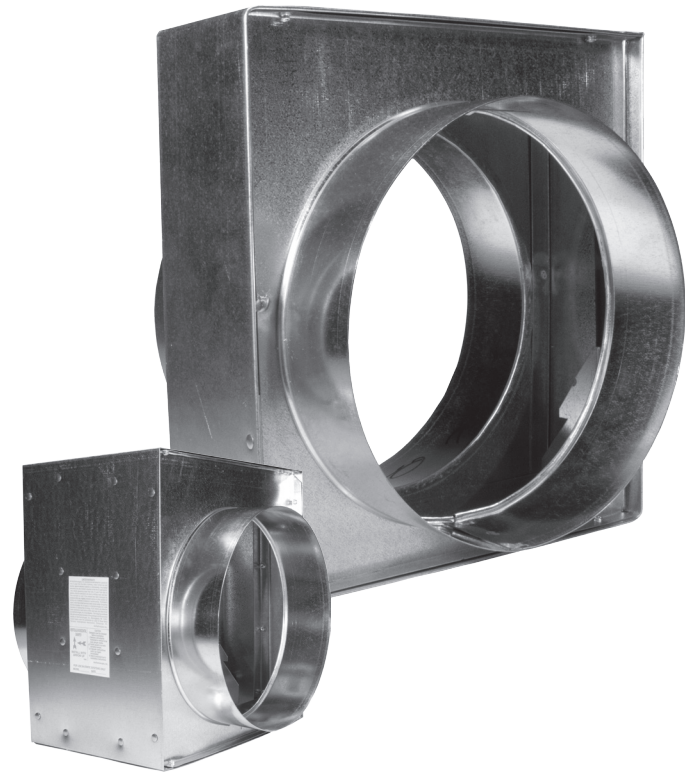

S
C
E
P
S

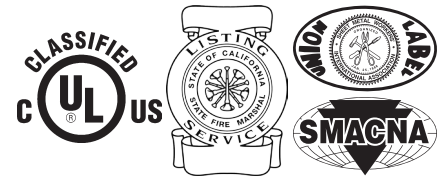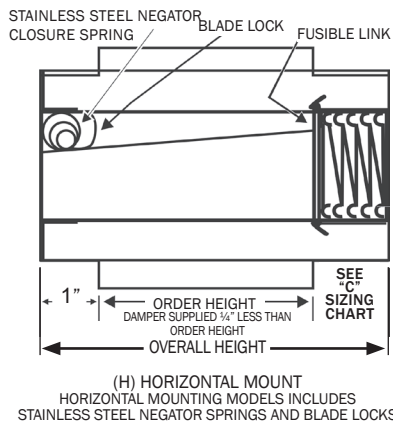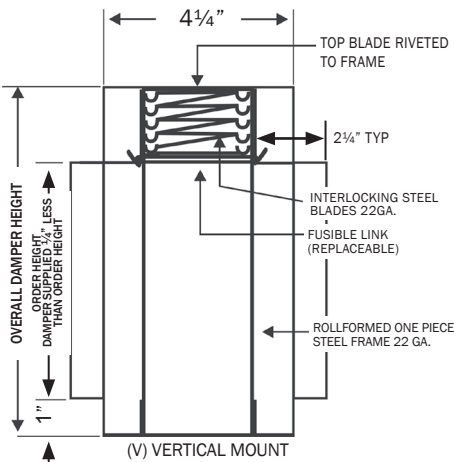


This product meets the requirements for fire dampers established by:

UL Standards 555
NFPA Standard 90A
ICC Building Codes

Qty.	Mount	Damper Size		Fusible Link Temp (165°F) std.	Factory Sleeve Length
	(V) vertical (H) horizontal	W	H		

Part Number Format

7 5 C H 0 2 4 0 0 0 G 2 2 1 2

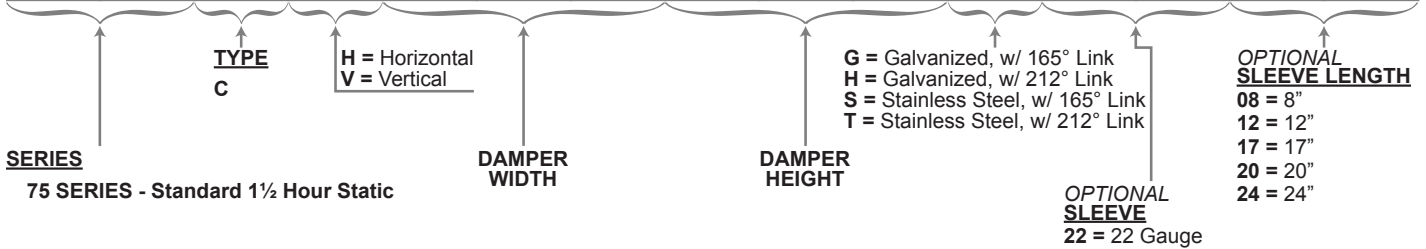

Submittal



AireTechnologies, Inc.
a DMI company

AireTechnologies, Inc.
1502 Industrial Drive
E. Monongahela, PA 15063

phone: 866.421.AIRE
fax 724.310.1262

www.airetechnologies.com