



**Aire Technologies, Inc.**  
a DMI company

Aire Technologies, Inc.  
1502 Industrial Drive  
E. Monongahela, PA 15063

phone: 866.421.AIRE  
fax 724.310.1262

www.airetechnologies.com

# submittal

Job \_\_\_\_\_  
 Location \_\_\_\_\_  
 Submitted to \_\_\_\_\_  
 Submittal Prepared by \_\_\_\_\_  
 Approve Date \_\_\_\_\_  
 Date \_\_\_\_\_

## Fire Damper Series 99 Type B

UL Classified - **3 Hour Rating**, Dynamic  
For use in installations rated 3 hours or greater

Standard Profile (4 1/4") 22 Ga  
1 piece rollformed frame

Type B Damper  
Blades out of air-stream

Available for vertical or horizontal installations

For installation in systems where fans remain running  
during fire and smoke control




Standard fusible link - 165° F (optional 212° F)

Available in stainless steel

Vertical dampers are available in single-section sizes  
from 4" x 4" to 36" x 32"

Horizontal dampers are available in single-section sizes  
from 4" x 4" to 24" x 21"

Optional 22 Ga Sleeve available:  
8", 12", 17", 20", or 24" lengths (12" is standard)

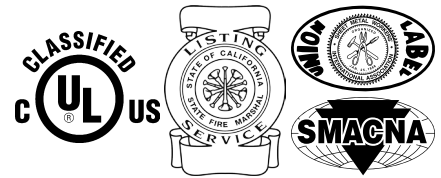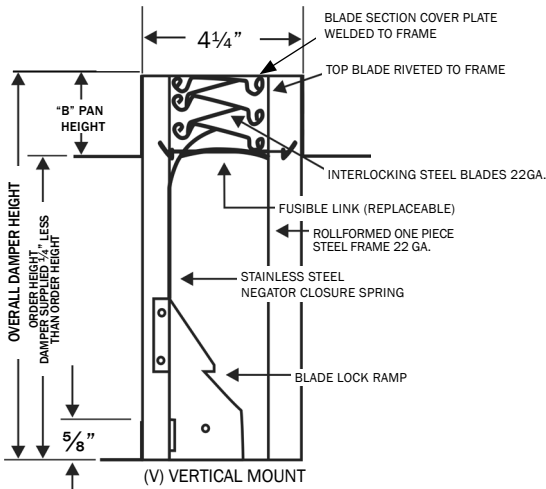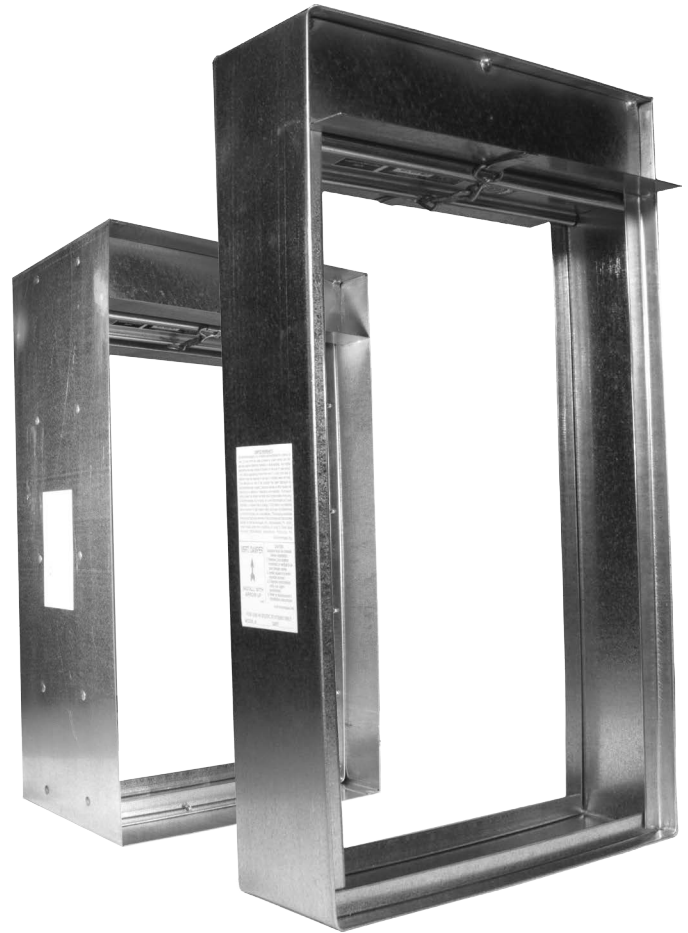


This product meets the requirements  
for fire dampers established by:

**UL Standards 555**  
**NFPA Standard 90A**  
**ICC Building Codes**

Qty.	Mount	Damper Size		Fusible Link Temp (165°F) std.	Factory Sleeve Length
	(V) vertical (H) horizontal	W	H		

## Part Number Format

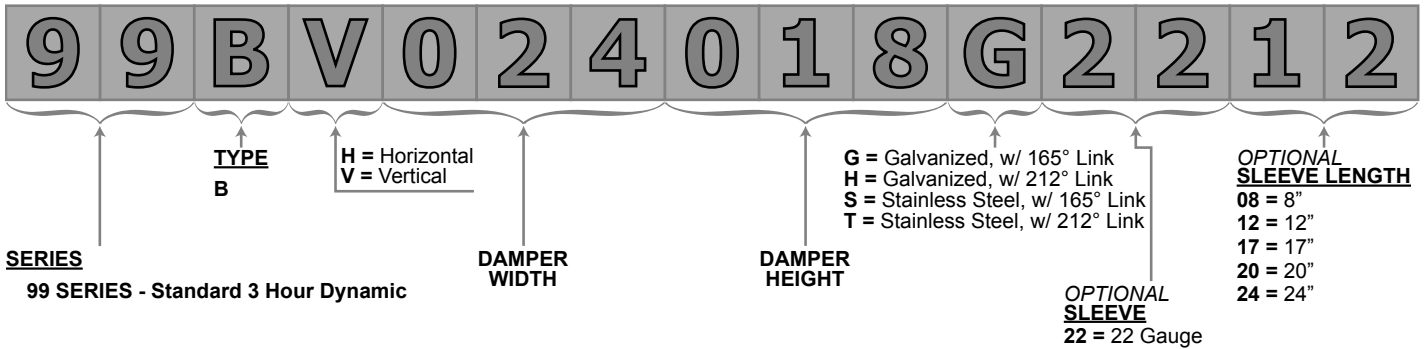

# Submittal



**AireTechnologies, Inc.**  
a DMI company

AireTechnologies, Inc.  
1502 Industrial Drive  
E. Monongahela, PA 15063

phone: 866.421.AIRE  
fax 724.310.1262

www.airetechnologies.com