

AireTechnologies, Inc. 1502 Industrial Drive E. Monongahela, PA <u>15063</u>

phone: 866.421.AIRE fax 724.310.1262

www.airetechnologies.com



Job_______ Location ______ Submitted to ______ Submittal Prepared by ______ Approve Date _____ Date

UL Classified - 1½ Hour Rating, Dynamic For use in installations rated less than 3 hours

Thinline Profile (2") 22 Ga 1 piece rollformed frame

Type A Damper Blades in air-stream

S

Φ

 \mathbf{Q}

ഗ

For installation in systems where fans remain running during fire and smoke control


Standard fusible link - 165° F (optional 212° F)


Vertical dampers are available in single-section sizes from 4" x 4" to 24" x 24"

Horizontal dampers are available in single-section sizes from 4" x 4" to 12" x 12"

Optional 22 Ga Sleeve available: 8", 12", 17", 20", or 24" lengths (12" is standard)

Fire Damper Series 61 Type A

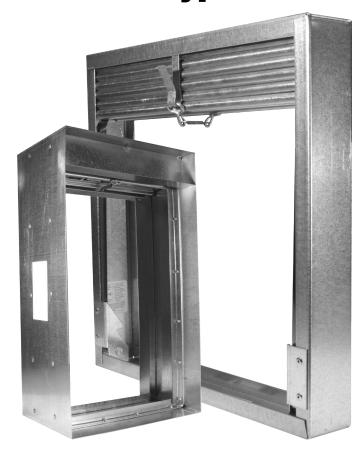






This product meets the requirements for fire dampers established by:

UL Standards 555 NFPA Standard 90A ICC Building Codes

Qty.	Mount	Damper Size		Fusible Link Temp	
	(V) vertical (H) horizontal	W	Н	(165°F) std.	Factory Sleeve Length

Part Number Format

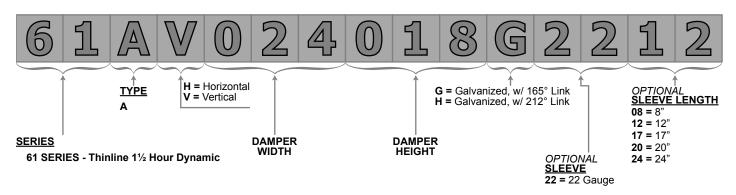





AireTechnologies, Inc. 1502 Industrial Drive E. Monongahela, PA 15063