



**Aire Technologies, Inc.**  
a DMI company

Aire Technologies, Inc.  
1502 Industrial Drive  
E. Monongahela, PA 15063

phone: 866.421.AIRE  
fax 724.310.1262

www.airetechnologies.com

# submittal

Job \_\_\_\_\_

Location \_\_\_\_\_

Submitted to \_\_\_\_\_

Submittal Prepared by \_\_\_\_\_

Approve Date \_\_\_\_\_

Date \_\_\_\_\_

UL Classified - **1½ Hour Rating**, Dynamic  
For use in installations rated less than 3 hours

**Thinline Profile (2") 22 Ga**  
1 piece rollformed frame

Type B Damper  
Blades out of air-stream

For installation in systems where fans remain running  
during fire and smoke control



Standard fusible link - 165° F (optional 212° F)

Vertical dampers are available in single-section sizes  
from 4" x 4" to 24" x 20"

Horizontal dampers are available in single-section sizes  
from 4" x 4" to 4" x 9"

Optional 22 Ga Sleeve available:  
8", 12", 17", 20", or 24" lengths (12" is standard)

## Fire Damper Series 61 Type B

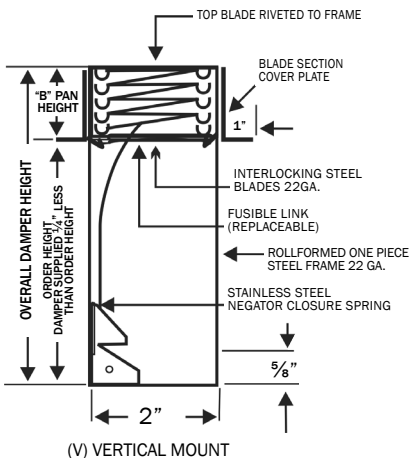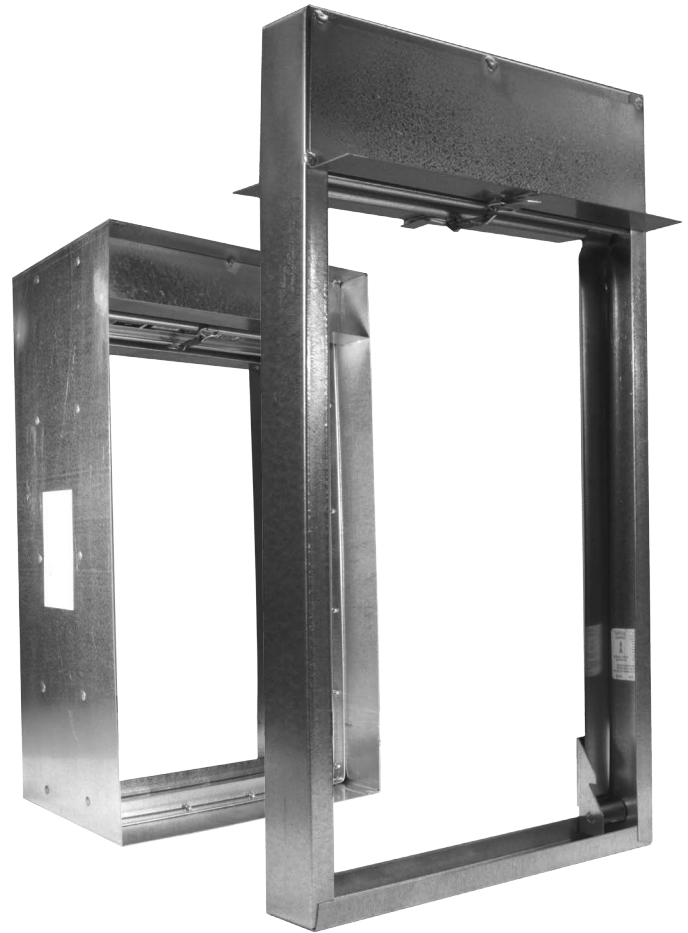


This product meets the requirements  
for fire dampers established by:

**UL Standards 555**  
**NFPA Standard 90A**  
**ICC Building Codes**

Qty.	Mount	Damper Size		Fusible Link Temp (165° F) std.	Factory Sleeve Length
	(V) vertical (H) horizontal	W	H		

## Part Number Format

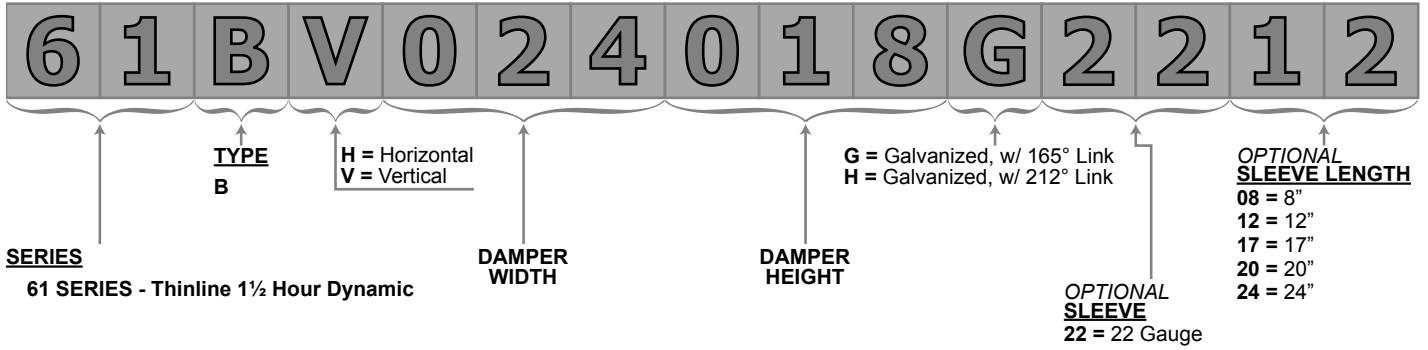

# submittal



**AireTechnologies, Inc.**  
a DMI company

AireTechnologies, Inc.  
1502 Industrial Drive  
E. Monongahela, PA 15063

phone: 866.421.AIRE  
fax 724.310.1262

www.airetechnologies.com