



# Series 05

Type C - Static Fire Damper

Job: \_\_\_\_\_

Location: \_\_\_\_\_

Submitted to: \_\_\_\_\_

Submittal Prepared by: \_\_\_\_\_

Approve Date: \_\_\_\_\_

Date: \_\_\_\_\_

## Specifications

### UL Classification:

UL Classified UL 555 - **3 Hour Rating**, Static For Use In Installations Rated 3 Hours Or Greater

### Profile:

Standard Profile - 4¼" 22Ga 1 Piece Rollformed Frame

### Material:

Galvanized Steel - Standard  
Stainless Steel - Optional

### Blades:

Blades and frame out of air-stream, 100% free area - Type C Damper

### Orientation:

Available For Vertical And Horizontal Installations

### Sizes:





Available In Single-Section Sizes:  
Vertical - 4" To 53"  
Horizontal - 4" To 38"  
Oval and Rectangular Sizes:  
Vertical - 6" x 6" to 58" x 52"  
Horizontal - 6" x 6" to 38" x 52"

### Fusible Link:

165° F Rated Link - Standard  
212° F Rated Link - Optional

### 22Ga Optional Sleeves:

12" Sleeve - Standard  
8", 17", 20", or 24" lengths - Optional

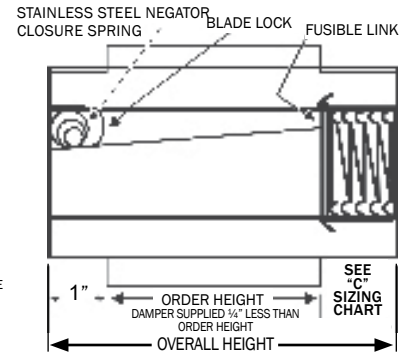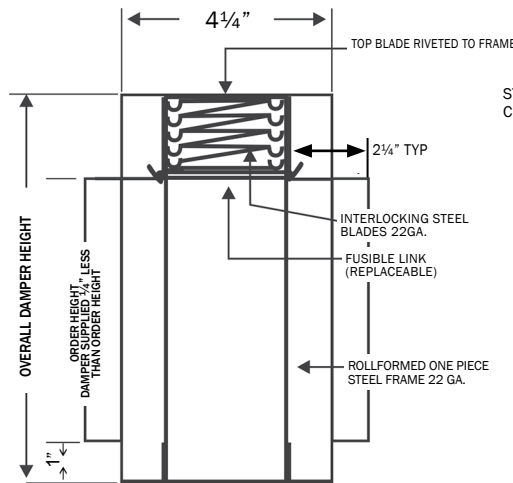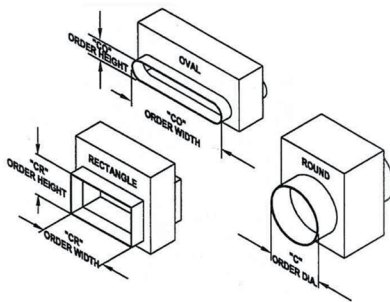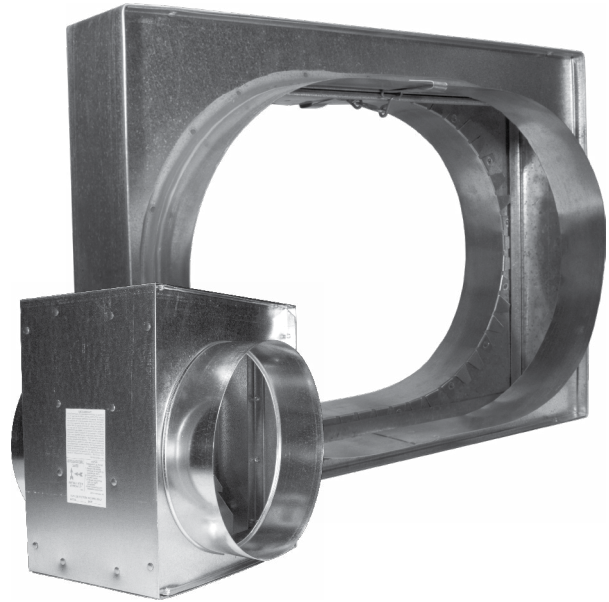

(H) HORIZONTAL MOUNT  
HORIZONTAL MOUNTING MODELS INCLUDES STAINLESS STEEL NEGATOR SPRINGS AND BLADE LOCKS

This product meets the requirements for fire dampers established by:

**UL Standards 555  
NFPA Standard 90A  
ICC Building Codes**



3225-1650-0107



Aire Technologies, Inc


1502 Industrial Drive, Monongahela, PA 15063

1-866-421-AIRE

atiorders@airetechnologies.com

AireTechnologies.com

# Part Number Format

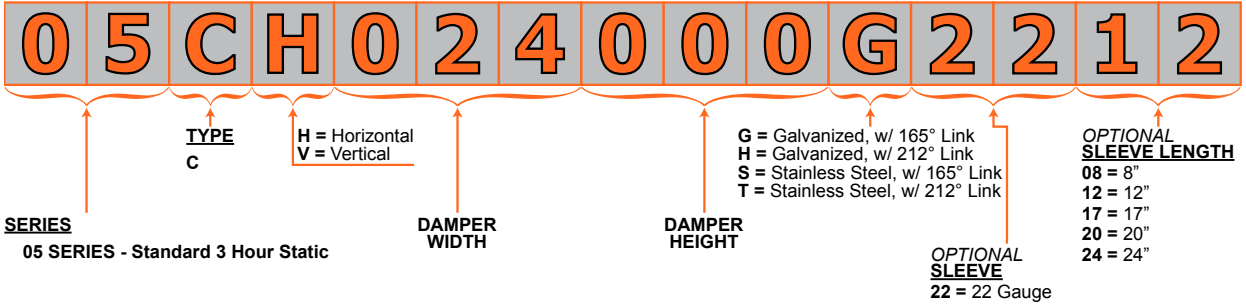

Qty.	Mount	Damper Size		Fusible Link Temp (165°F) std.	Factory Sleeve Length
	(V) Vertical (H) Horizontal	W	H		

