



Series 05

Type C - Static Fire Damper

Job: _____

Location: _____

Submitted to: _____

Submittal Prepared by: _____

Approve Date: _____

Date: _____

Specifications

UL Classification:

UL Classified UL 555 - **3 Hour Rating**, Static For Use In Installations Rated 3 Hours Or Greater

Profile:

Standard Profile - 4¼" 22Ga 1 Piece Rollformed Frame

Material:

Galvanized Steel - Standard
Stainless Steel - Optional

Blades:

Blades and frame out of air-stream, 100% free area - Type C Damper

Orientation:

Available For Vertical And Horizontal Installations

Sizes:





Available In Single-Section Sizes:
Vertical - 4" To 53"
Horizontal - 4" To 38"
Oval and Rectangular Sizes:
Vertical - 6" x 6" to 58" x 52"
Horizontal - 6" x 6" to 38" x 52"

Fusible Link:

165° F Rated Link - Standard
212° F Rated Link - Optional

22Ga Optional Sleeves:

12" Sleeve - Standard
8", 17", 20", or 24" lengths - Optional

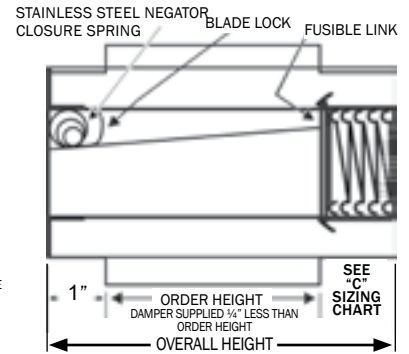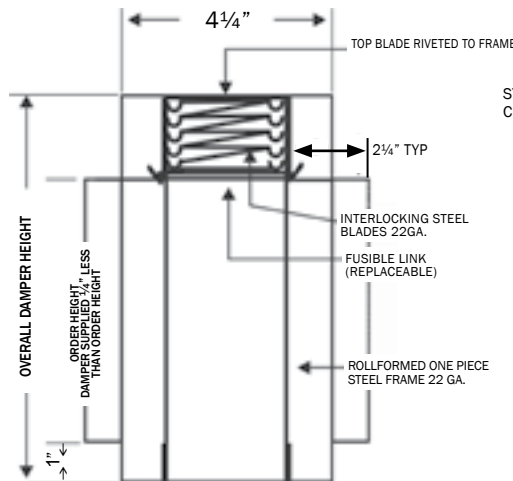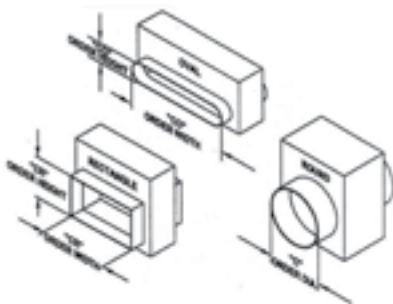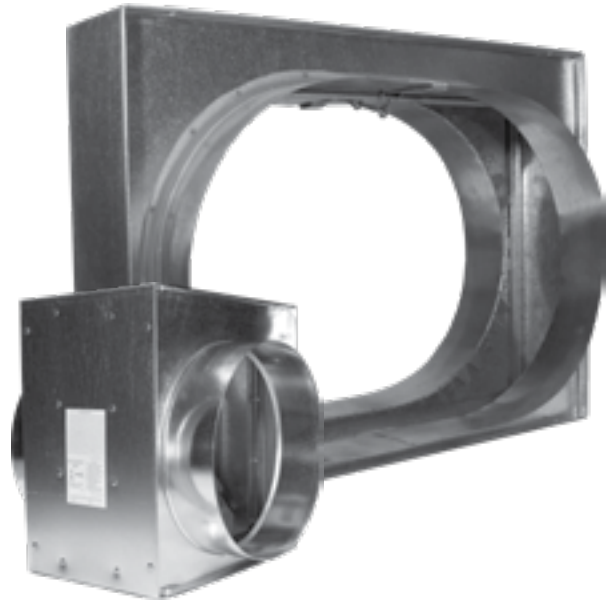

(H) HORIZONTAL MOUNT
HORIZONTAL MOUNTING MODELS INCLUDES STAINLESS STEEL NEGATOR SPRINGS AND BLADE LOCKS

This product meets the requirements for fire dampers established by:

**UL Standards 555
NFPA Standard 90A
ICC Building Codes**



3225-1650-0107



Aire Technologies


1502 Industrial Drive, Monongahela, PA 15063

1-866-421-AIRE

atorders@airetechnologies.com

AireTechnologies.com

Part Number Format

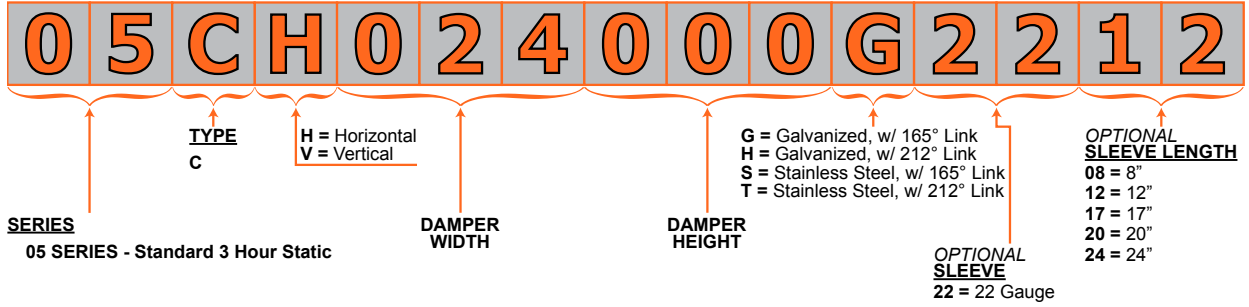

Qty.	Mount	Damper Size		Fusible Link Temp (165°F) std.	Factory Sleeve Length
	(V) Vertical (H) Horizontal	W	H		

