



# Series 65

Type B - Thinline Static Fire Damper

Job: \_\_\_\_\_

Location: \_\_\_\_\_

Submitted to: \_\_\_\_\_

Submittal Prepared by: \_\_\_\_\_

Approve Date: \_\_\_\_\_

Date: \_\_\_\_\_

## Specifications

### UL Classification:

UL Classified UL 555 - 1½ Hour Rating, Static For Use In Installations Rated Less Than 3 Hours

### Profile:

Thinline Profile - 2" 22Ga 1 Piece Rollformed Frame

### Material:

Galvanized Steel - Standard  
Stainless Steel - Optional (Vertical Only)

### Blades:

Blades Out Of Air-Stream - Type B Damper

### Orientation:

Available For Vertical And Horizontal Installations

### Sizes:



Available In Single-Section Sizes:  
Vertical - 4" x 3" To 48" x 41"  
Horizontal - 4" x 3" To 36" x 30"

### Fusible Link:

165° F Rated Link - Standard  
212° F Rated Link - Optional

### 22Ga Optional Sleeves:

12" Sleeve - Standard  
8", 17", 20", or 24" lengths - Optional

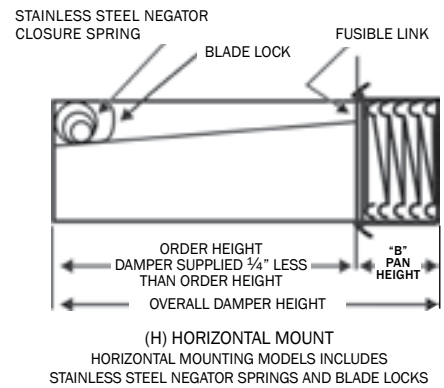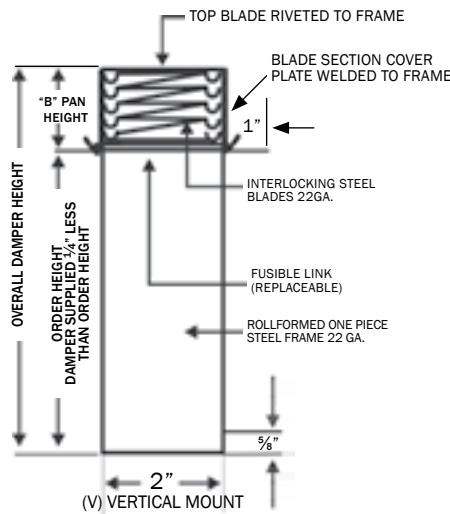

This product meets the requirements for fire dampers established by:

**UL Standards 555**  
**NFPA Standard 90A**  
**ICC Building Codes**



Aire Technologies


1502 Industrial Drive, Monongahela, PA 15063

1-866-421-AIRE

atorders@airetechnologies.com

AireTechnologies.com

# Part Number Format

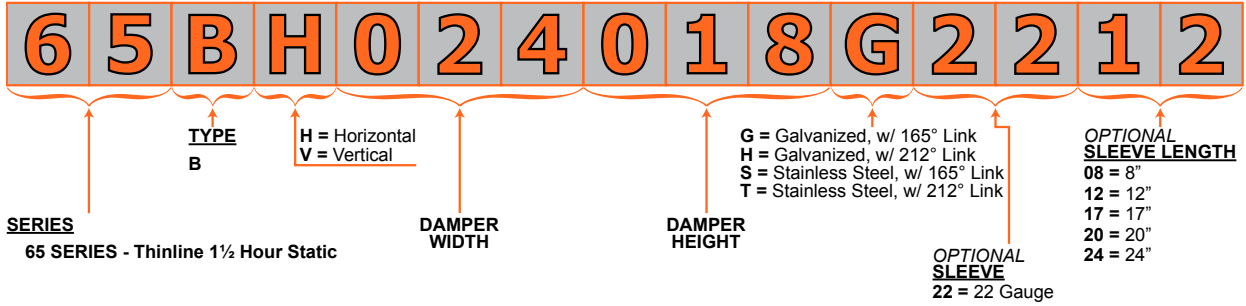

Qty.	Mount	Damper Size		Fusible Link Temp (165°F) std.	Factory Sleeve Length
	(V) Vertical (H) Horizontal	W	H		

