



Series 65

Type B - Thinline Static Fire Damper

Job: _____

Location: _____

Submitted to: _____

Submittal Prepared by: _____

Approve Date: _____

Date: _____

Specifications

UL Classification:

UL Classified UL 555 - 1½ Hour Rating, Static For Use In Installations Rated Less Than 3 Hours

Profile:

Thinline Profile - 2" 22Ga 1 Piece Rollformed Frame

Material:

Galvanized Steel - Standard
Stainless Steel - Optional (Vertical Only)

Blades:

Blades Out Of Air-Stream - Type B Damper

Orientation:

Available For Vertical And Horizontal Installations

Sizes:



Available In Single-Section Sizes:
Vertical - 4" x 3" To 48" x 41"
Horizontal - 4" x 3" To 36" x 30"

Fusible Link:

165° F Rated Link - Standard
212° F Rated Link - Optional

22Ga Optional Sleeves:

12" Sleeve - Standard
8", 17", 20", or 24" lengths - Optional

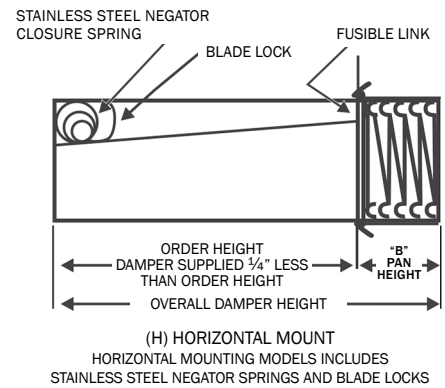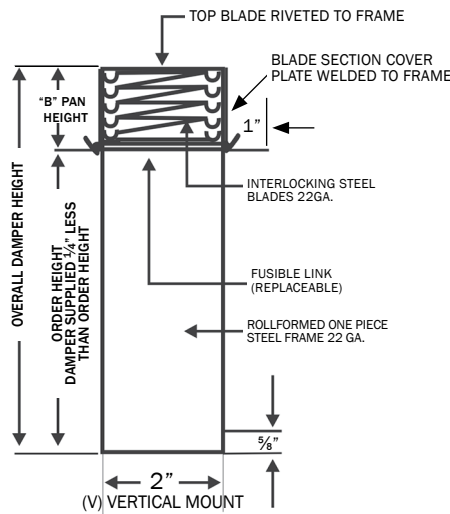

This product meets the requirements for fire dampers established by:

UL Standards 555
NFPA Standard 90A
ICC Building Codes



3225-1650-0107



Aire Technologies, Inc


1502 Industrial Drive, Monongahela, PA 15063

1-866-421-AIRE

atiorders@airetechnologies.com

AireTechnologies.com

Part Number Format

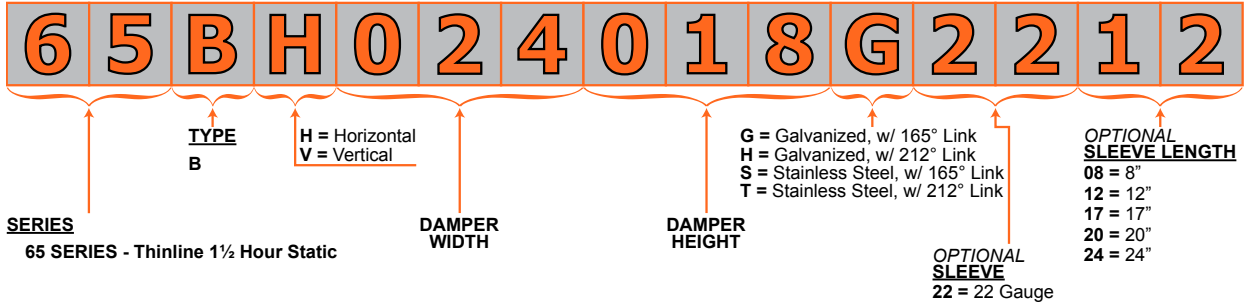

Qty.	Mount	Damper Size		Fusible Link Temp (165°F) std.	Factory Sleeve Length
	(V) Vertical (H) Horizontal	W	H		

