



Series 50

With Boot

Specifications

UL Classification:

UL Classified UL 263 - For Use In UL 263 Wood Truss Floor/Ceiling And Roof/Ceiling Assemblies Rated 1 Hour

UL Floor/Ceiling Assemblies:

Approved for Use in L-587*, L528, L558, L562, L563 L574, and L585
* ATI Exclusive Listings

UL Roof/Ceiling Assemblies:

Approved for Use in P-556*, P533, P544, P545, P547, and P580
* ATI Exclusive Listings

Ceiling Radiation Damper Type:

Incorporates a UL 555C evaluated ceiling damper for use in register opening applications

Profile:

22Ga 1 Piece Rollformed Frame And Blades

Material:

Galvanized Steel

Fusible Link:

165° F Rated Link - Standard
212° F Rated Link - Optional

Fusible Link Type:

Standard Link Attachment (SL) - Optional
Easy Access Attachment (EA) - Standard

Enclosure Types:

Flanged or Non-Flanged
28Ga 90° Boot
28Ga Straight Boot
28Ga End Boot

Sizes:

4" x 6" x 4"Ø to 14" x 14" x 10"Ø

Thermal Blanket:

Ceramic Thermal Blanket Provided On Units With CRD Blade Areas Of Greater Than 84 Sq. In.



Job: _____


Location: _____

Submitted to: _____

Submittal Prepared by: _____

Approve Date: _____

Date: _____

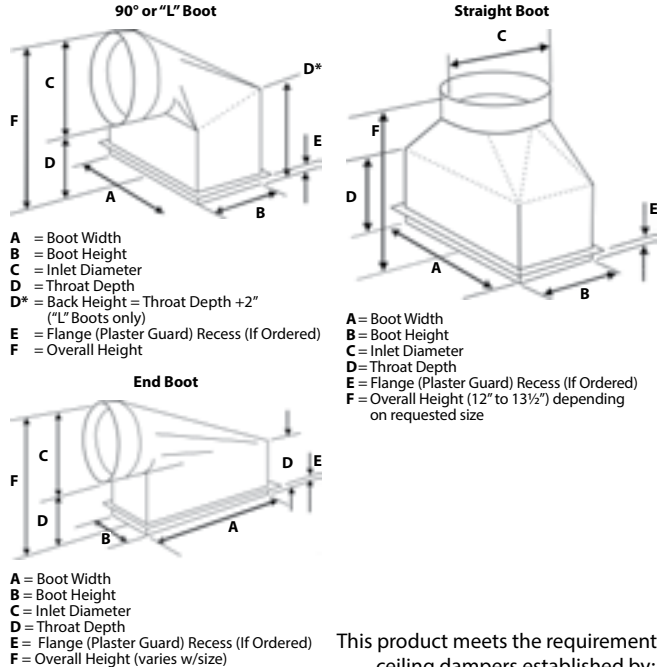

This product meets the requirements for ceiling dampers established by:

**UL Standards 263 and 555C
NFPA Standard 90A
ICC Building Codes**



3226-1650:0105



Aire Technologies

1502 Industrial Drive, Monongahela, PA 15063


1-866-421-AIRE

atiorders@airetechnologies.com

AireTechnologies.com

Part Number Format

5 0 E A 0 6 1 0 G 0 7 L 6 F

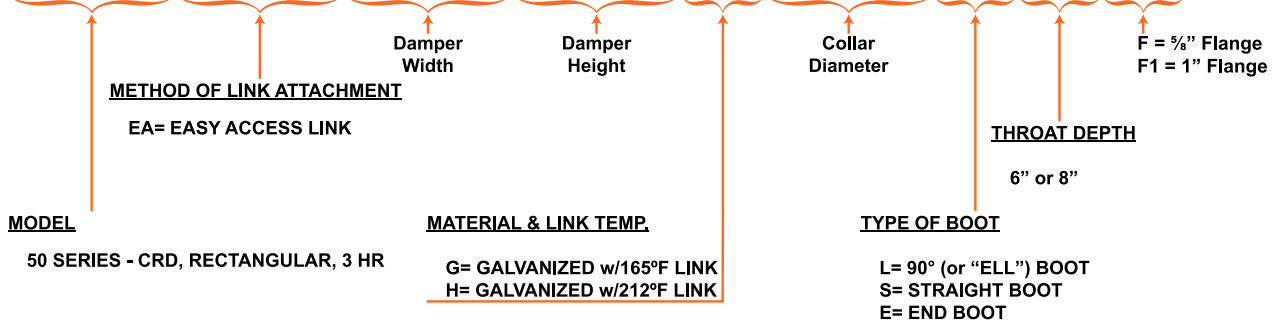

Qty.	Damper Size		Fusible Link Temp (165°F) std.	Factory Boot Option					
	W	H		Type			Collar Size	Throat Depth	Flange
				L	S	E			

