



# Series 50

With Boot

## Specifications

### UL Classification:

UL Classified UL 263 - For Use In UL 263 Wood Truss Floor/Ceiling And Roof/Ceiling Assemblies Rated 1 Hour

### UL Floor/Ceiling Assemblies:

Approved for Use in L-587\*, L528, L558, L562, L563 L574, and L585  
\* ATI Exclusive Listings

### UL Roof/Ceiling Assemblies:

Approved for Use in P-556\*, P533, P544, P545, P547, and P580  
\* ATI Exclusive Listings

### Ceiling Radiation Damper Type:

Incorporates a UL 555C evaluated ceiling damper for use in register opening applications

### Profile:

22Ga 1 Piece Rollformed Frame And Blades

### Material:

Galvanized Steel

### Fusible Link:

165° F Rated Link - Standard  
212° F Rated Link - Optional

### Fusible Link Type:

Standard Link Attachment (SL) - Optional  
Easy Access Attachment (EA) - Standard

### Enclosure Types:

Flanged or Non-Flanged  
28Ga 90° Boot  
28Ga Straight Boot  
28Ga End Boot

### Sizes:

4" x 6" x 4"Ø to 14" x 14" x 10"Ø

### Thermal Blanket:

Ceramic Thermal Blanket Provided On Units With CRD Blade Areas Of Greater Than 84 Sq. In.



Job: \_\_\_\_\_



Location: \_\_\_\_\_

Submitted to: \_\_\_\_\_

Submittal Prepared by: \_\_\_\_\_

Approve Date: \_\_\_\_\_

Date: \_\_\_\_\_

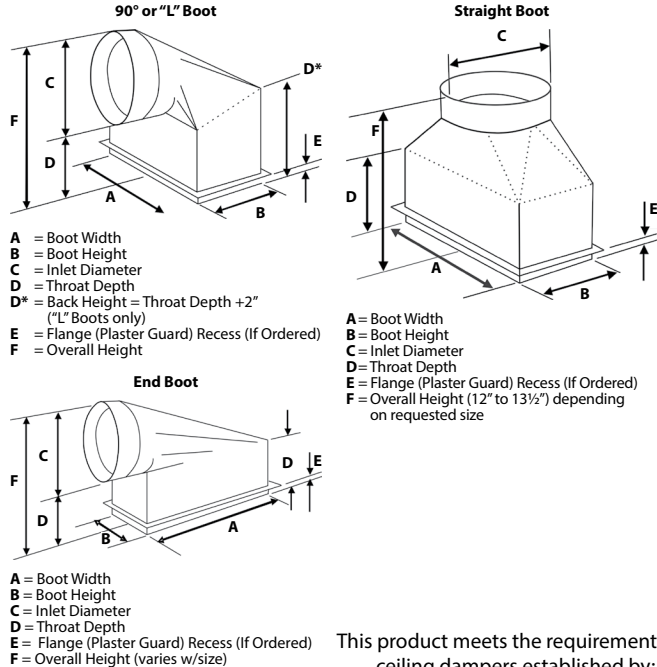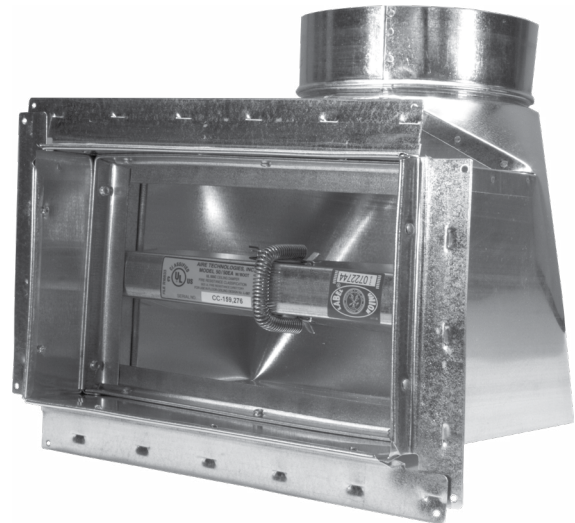

This product meets the requirements for ceiling dampers established by:

**UL Standards 263 and 555C  
NFPA Standard 90A  
ICC Building Codes**



3226-1650:0105



Aire Technologies, Inc

1502 Industrial Drive, Monongahela, PA 15063


1-866-421-AIRE

atiorders@airetechnologies.com

AireTechnologies.com

# Part Number Format

**5 0 E A 0 6 1 0 G 0 7 L 6 F**

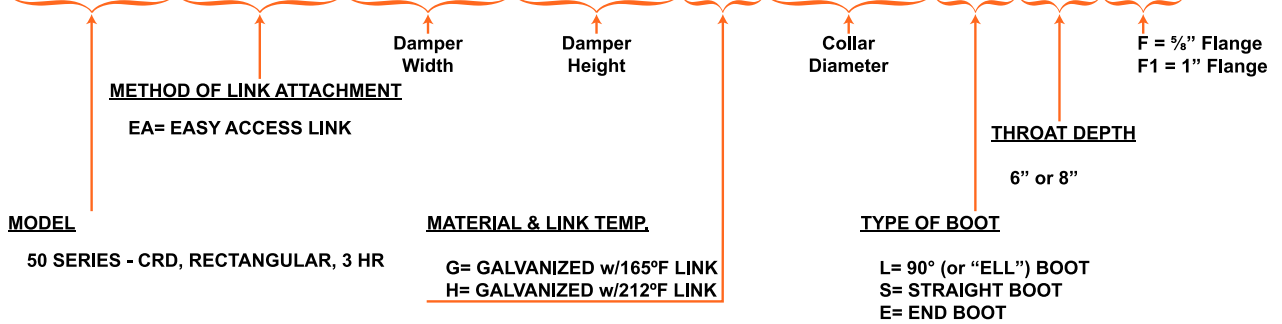

Qty.	Damper Size		Fusible Link Temp (165°F) std.	Factory Boot Option						
	W	H		Type			Collar Size	Throat Depth	Flange	
				L	S	E				

