



Series 50

Rectangular CRD

Specifications

UL Classification:

UL Classified UL 555C - For use in non-combustible installations rated 3 hours or less.

Profile:

22Ga 1 Piece Rollformed Frame And Blades

Material:

Galvanized Steel

Fusible Link:

165° F Rated Link - Standard
212° F Rated Link - Optional

Fusible Link Type:

Easy Access Attachment (EA) - Standard
Standard Link Attachment (SL) - Optional

Sizes:

Available in Single-Section Sizes From 4" x 6" or 6" x 4" to 24" x 24"

Thermal Blanket:

Ceramic Thermal Blanket Provided On Units With CRD Blade Areas Of Greater Than 84 Sq. In.

Job: _____




Location: _____

Submitted to: _____

Submittal Prepared by: _____

Approve Date: _____

Date: _____

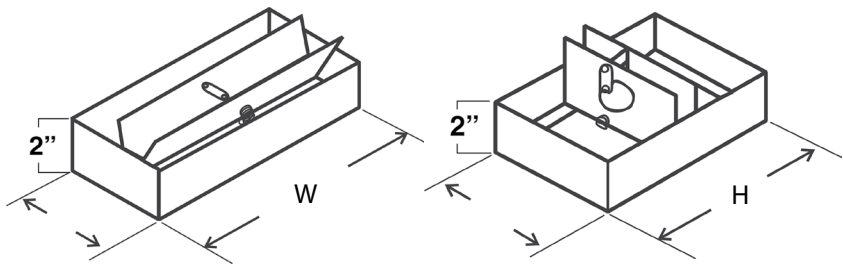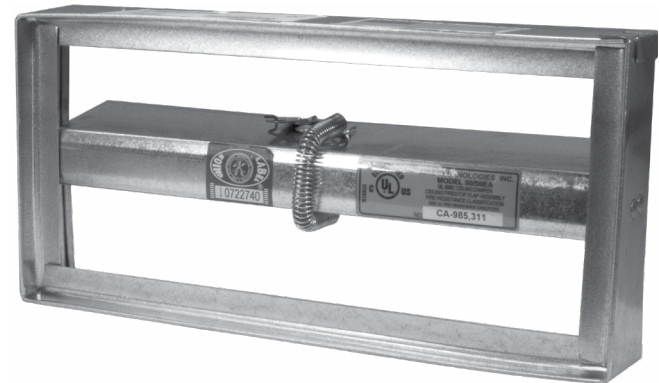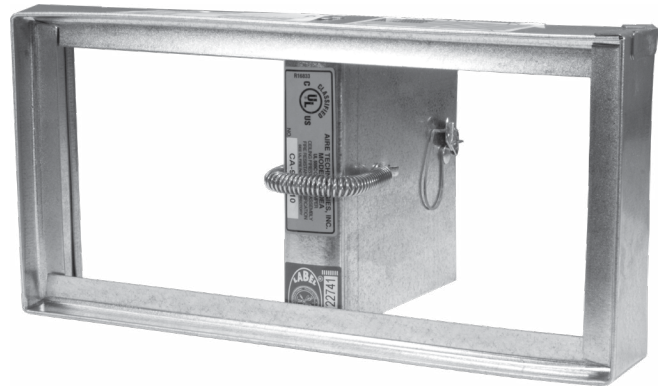

This product meets the requirements for ceiling dampers established by:

**UL Standard 555C
NFPA Standard 90A
ICC Building Codes**



Aire Technologies, Inc

1502 Industrial Drive, Monongahela, PA 15063

1-866-421-AIRE

atiorders@airetechnologies.com

AireTechnologies.com

Part Number Format



MODEL

50 SERIES - CRD, RECTANGULAR, 3 Hour

METHOD OF LINK ATTACHMENT

SL - STANDARD LINK
EA - EASY ACCESS LINK

MATERIAL & LINK TEMP.

G - GALVANIZED, W/165° LINK
H - GALVANIZED, W/212° LINK

| Qty. | Damper Size | | Fusible Link Temp (165°F) std. |
|------|-------------|---|-----------------------------------|
| | W | H | |
| | | | |
| | | | |
| | | | |
| | | | |

