



# Series 57

IB Insulated Box CRD

## Specifications

**UL Classification:**

UL Classified UL 263 - For Use In UL 263 Wood Truss Floor/Ceiling And Roof/Ceiling Assemblies Rated 1 Hour

**UL Floor/Ceiling Assemblies:**

Approved for use in L-587\*, L528, L558, L562, L574, and L585  
\*ATI Exclusive Listings

**UL Roof/Ceiling Assemblies:**

Approved for use in P-556\*, P533, P545, P547, and P580

**Ceiling Radiation Damper Type:**

Incorporates a UL 555C evaluated ceiling damper for use in register opening applications

**Exclusive Feature:**

Approval for Class 0 and 1 Flex-Duct OR Steel Pipe Elbow Connections to Achieve Top-Out or Side-Out Configurations

**Profile:**

22Ga 1 Piece Rollformed Frame And Blades

**Material:**

Galvanized Steel

**Fusible Link:**

165° F Rated Link - Standard  
212° F Rated Link - Optional

**Fusible Link Type:**

Standard Link Attachment (SL) - On 4" Diameter And Up  
Easy Access Attachment (EA) - On 5" Diameter And Up

**Enclosure Types:**

28Ga Box and Collar Available with 1½" R-6 or 2" R-8 Duct Liner Insulation

**Sizes:**

Available in a Range of Sizes From 4" x 8" x 4" to 16" x 16" x 12" to

**Thermal Blanket:**

Ceramic Thermal Blanket Provided On Units With CRD Blade Areas Of Greater Than 84 Sq. In.



Job: \_\_\_\_\_



Location: \_\_\_\_\_

Submitted to: \_\_\_\_\_

Submittal Prepared by: \_\_\_\_\_

Approve Date: \_\_\_\_\_

Date: \_\_\_\_\_

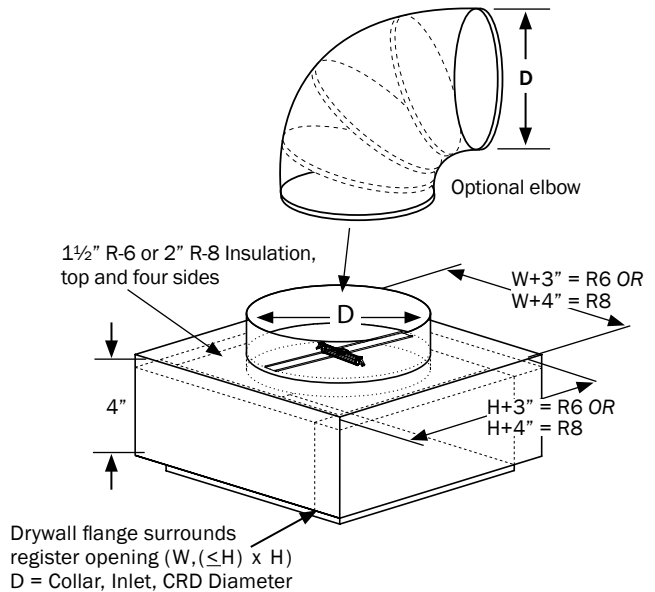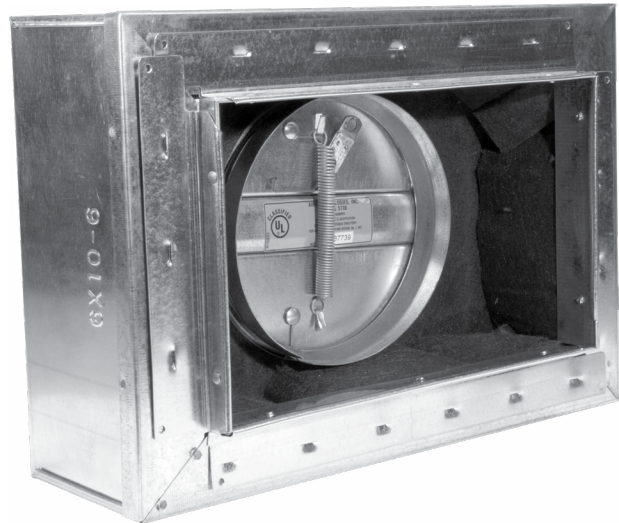

This product meets the requirements for ceiling dampers established by:

**UL Standards 263 and 555C  
NFPA Standard 90A  
ICC Building Codes**



3226-1650:0106



Aire Technologies, Inc

1502 Industrial Drive, Monongahela, PA 15063

1-866-421-AIRE

atiorders@airetechnologies.com

AireTechnologies.com

# Part Number Format

**5 7 I B 0 6 1 0 G 0 7 T 4 F**

**MODEL**

57 SERIES

**INSULATED  
BOOT/BOX**

**DAMPER  
WIDTH**

**DAMPER  
HEIGHT**

**COLLAR  
DIA.**

**FLANGE**

F - 5/8" FLANGE  
F1 - 1" FLANGE

**MATERIAL & LINK TEMP.**

G - GALVANIZED, W/165° LINK  
H - GALVANIZED, W/212° LINK

**INSULATION**

T4 - R6 INSULATION  
R8 - R8 INSULATION

Qty.	Register Opening		Fusible Link Temp (165° std.)	Collar Diameter	Insulation	Flange
	W	H				

