

Submittal

Job _____
 Location _____
 Submitted to _____
 Submittal Prepared by _____
 Approve Date _____
 Date _____

Series 51 With Boot

Series 51 CRD's are available with accompanying boots installed in 90°("L") in flanged or non-flanged varieties.

UL Classified - For use in UL 263 wood truss floor/ceiling and roof/ceiling assemblies rated 1 hour

Approved for Use in **L-587***, **L528**, **L558**, **L562**, **L574**, and **L585** Floor/Ceiling

P-556*, **P533**, **P545**, **P547**, and **P580** Roof/Ceiling

* ATI Exclusive Listings

Incorporates UL 555C evaluated ceiling damper

22 Ga CRD frame and blades, 28 Ga Boot


Standard fusible link - 165° F (optional 212° F)

Ceramic Thermal Blanket provided on units with CRD areas of greater than 84 sq. in.

Available in sizes
6" x 4" x 4" to 14" x 12" x 10"



90° or "L" Boot

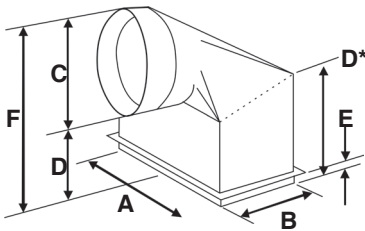

- A = Boot Width
- B = Boot Height
- C = Inlet Diameter
- D = Throat Depth
- D* = Back Height = Throat Depth + 2"
("L" Boots only)
- E = Flange (Plaster Guard) Recess
(If Ordered)
- F = Overall Height




3226-1650: 0104
This product meets the requirements for ceiling dampers established by:

UL Standard 555C
NFPA Standard 90A
ICC Building Codes

Qty.	Damper Size		Fusible Link Temp (165°F) std.	Factory Boot Option					
	W	H		Type			Collar Size	Throat Depth	Flange
				L	S	E			

Part Number Format

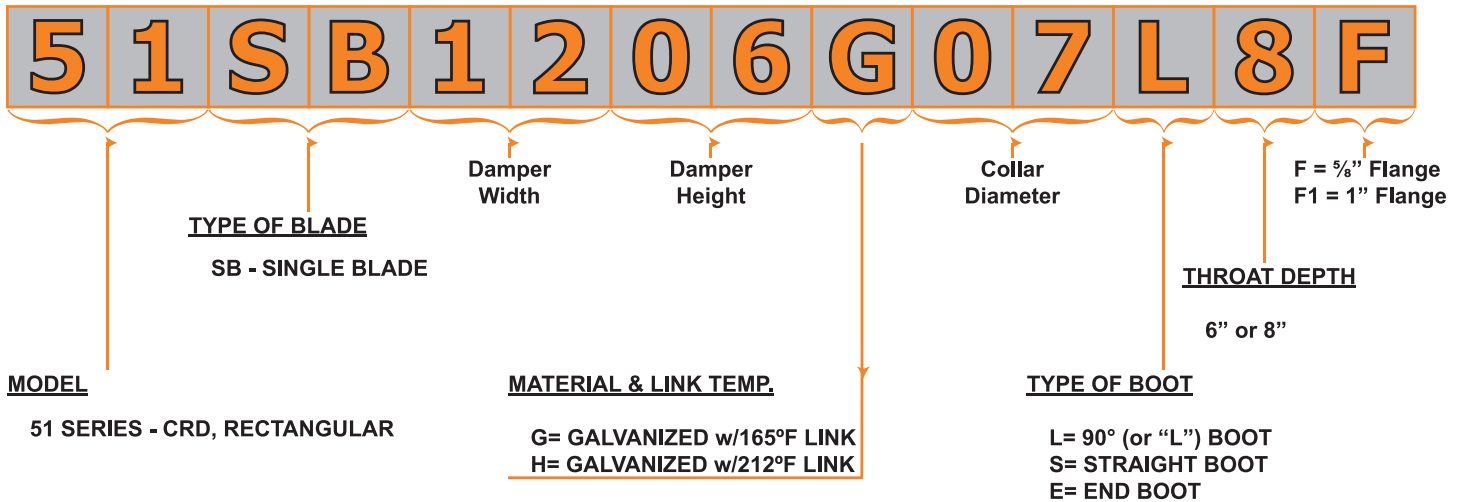

Submittal



AireTechnologies, Inc
a DMI company

AireTechnologies, Inc.
1502 Industrial Drive
E. Monongahela, PA 15063

phone: 866.421.AIRE
fax 724.310.1262

www.airetechnologies.com